



Serenity
Sliding Door Systems

— ATTRACTIVE & OPEN

EvenView Slide

Featuring a variety of glazing options, this flush-mount system supports natural lighting with a modern acoustic solution.

- ✓ Elevates your Space
- ✓ Maximizes Square Footage
- ✓ Invites in Natural Light



Let the Light In Improve Employee Wellbeing

Great for open-space concepts, the EvenView Slide mounts flush to the wall for a seamless look. Several glazing options are offered to carry light throughout the space. With its ease of use and sound control, the EvenView is the ideal solution for modern offices.

EvenView Slide Features

- Flush-Mounted Design**
Mounts flush within the wall for maximum space savings
- Sidelites / Transoms**
Add glazing to your system (glass by others)
- Double Sound Seal**
Enhances privacy and reduces noise
- Finish Options**
Available in clear and black anodized, or powder coat
- Soft Close / Soft Open**
Provides smooth, controlled door movement
- Concealed Floor Guide**
Guides the door slab for smooth, reliable positioning

OPTIONAL UPGRADES

Key/Privacy Lockable


Meet your security needs with various lock types

Acoustic Door Bottom

Drops automatically when the door is closed to create a sound seal

Antimicrobial Hardware

Protect against germs with custom additives or specialty metals

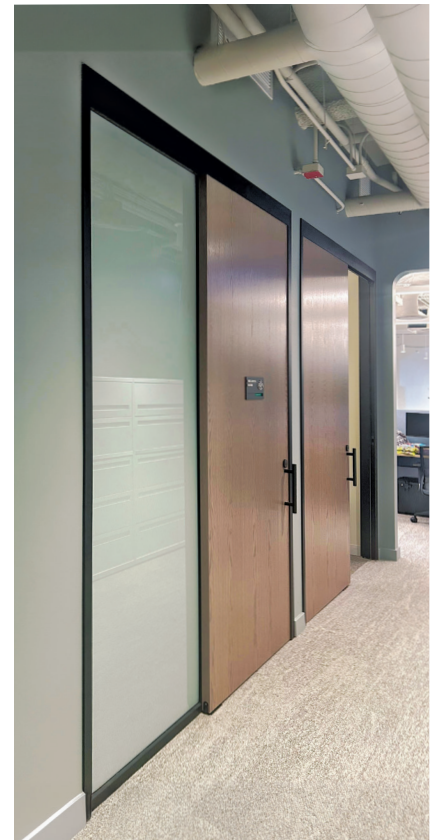

Product Technical Information

	Mounting	Valance	Soft Close & Soft Open	Mechanical Spring Closer	Acoustic Door Bottom	Locking	Aluminum Door	Automatic Operator	Sidelite (Glass by Others)	Transom	STC	Smoke Rating
MedSlide	Surface	Squared or Sloped	Standard	--	Optional	Optional	Optional	--	--	--	--	--
MedSlide Plus	Surface	Squared or Sloped	Standard	--	Standard	Optional	--	Optional	--	--	STC26 ₁	--
MedSlide Pro	Surface	Squared or Sloped	Standard	--	Standard	Optional	--	Optional	--	--	STC35 ₂	--
PowerSlide	Surface	Standard Valance	Standard	--	Optional	Access Control by Others	Optional	Standard ₃	Optional	--	Optional	--
SurfaceView Slide	Surface	Squared or Sloped	Standard	Optional	Optional	Optional	Optional	Optional	Standard	Optional	--	--
EvenView Slide	Flush	Fascia Only	Standard	--	Optional	Optional	Optional	--	Standard	Optional	--	--
SmokeSlide	Surface	Squared or Sloped	Soft Close Only	Standard	Standard	Optional	Optional	Optional	--	--	--	UL1784 ₄
SecureSlide	Surface	Squared or Sloped	Soft Close Only	Standard	Optional	Auto Latch Standard	Optional	Optional	Optional	Optional	--	--
SyncSlide	Surface	Squared or Sloped	Standard	--	Optional	Optional	Optional	Optional	Optional	--	--	--

-- = Not Available

1 = Tested per ASTM E90 on a 48" x 84.5" operable door with an STC rating of 26. Performance may vary with other sizes; no guarantee is made without testing the specific configuration. Test results available [here](#).

2 = Tested per ASTM E90 on a 44" x 83.75" operable door with an STC rating of 35. Performance may vary with other sizes; no guarantee is made without testing the specific configuration. Test results available [here](#).

3 = Includes Record 7000 Series Automatic Opener

4 = Approved for door leaf sizes from 44" x 84" up to a maximum of 56" x 96" per the current UL 1784 listing. Performance applies only to doors built to the same configuration; changes to size, materials, or sealing details may affect results. Wood test results are available [here](#), and Aluminum test results are available [here](#).

Surface Mount Formulas (Excluding SurfaceView & SyncSlide)

Finished Frame (Inches)	Frame Width = Clear Open Width + 5 Frame Height = Clear Open Height
Rough Opening (Inches)	Rough Open Width = Frame Width + 1.5 Rough Open Height = Frame Height + 1
Door Slab (Inches)	Slab Width = Clear Open Width + 8 Slab Height = Clear Open Height

EvenView Formulas

Finished Frame (Inches)	Frame Width = Clear Open Width + 5.75 Frame Height = Clear Open Height + 2.75
Sidelite (Inches)	Minimum Sidelite Width = Clear Open Width + 1.5 Sidelite Height = Clear Open Height - 1.5
Rough Opening (Inches)	Rough Open Width = Finished Frame + Sidelite + 3 Rough Open Height = Finished Frame + 1
Door Slab (Inches)	Slab Width = Clear Open Width + 7.25 Slab Height = Clear Open Height

Frame

- Standard frame depths are 5", 5-1/4", 5-1/2", 6-1/8" and 7-1/4". Please contact your local sales rep for questions regarding other frame sizes.
- The EvenView Slide frame is available only in a 4-7/8" depth; greater depths require a wall starter.
- Standard frame finishes are Clear and Black Anodized. All Powder Coat finishes are considered custom and subject to additional fees.

Hardware

- Standard hardware package includes 12" back-to-back ladder pulls, dual soft-close mechanisms, and floor guide, unless otherwise specified in the table above; upgraded packages available at additional cost.
- Standard hardware finishes are 630/32D and 622/19. All other finishes are considered custom and subject to additional fees.
- Standard Schlage C cylinder in 26D finish included with keyed locksets; SFIC and LFIC housings available upon request (cores by others).
- Kenwa PS-12 Mechanical Spring Closer included with SmokeSlide and SecureSlide; optional on other systems at additional cost.

Seals

- Triple fin trailing-edge seal included with all systems.
- Felt sound seals installed in receiving channel and track valance for added sound attenuation.
- Pemko Planet SN-RD series acoustic door bottom included on all STC & Smoke-rated openings; optional on other systems at additional cost.

Supporting Documents

Test Reports

[Link](#)

Installation Manuals

[Link](#)

Architectural Specifications

[Link](#)

Product Technical Information


Call Out	Frame		Door Slab		Track	Minimum Visible Sidelite (Glass by Others)		Minimum Rough Opening w/ Sidelite	
	Width (Inches)	Height (Inches)	Width (Inches)	Height (Inches)	Length (Inches)	Width (Inches)	Height (Inches)	Width (Inches)	Height (Inches)
2-8 x 6-8	37.75	82.75	39.25	80	72.75	33.5	78.5	74.25	83.75
3-0 x 6-8	41.75	82.75	43.25	80	80.75	37.5	78.5	82.25	83.75
3-0 x 7-0	41.75	86.75	43.25	84	82.25	37.5	82.5	82.25	87.75
3-4 x 7-0	45.75	86.75	47.25	84	88.75	41.5	82.5	90.25	87.75
4-0 x 7-0	53.75	86.75	55.25	84	104.75	49.5	82.5	106.25	87.75
3-0 x 8-0	41.75	98.75	43.25	96	82.25	37.5	94.5	82.25	99.75
3-4 x 8-0	45.75	98.75	47.25	96	88.75	41.5	94.5	90.25	99.75
4-0 x 8-0	53.75	98.75	55.25	96	104.75	49.5	94.5	106.25	99.75
3-0 x 9-0	41.75	110.75	43.25	108	82.25	37.5	107.5	82.25	111.75
3-4 x 9-0	45.75	110.75	47.25	108	88.75	41.5	107.5	90.25	111.75
4-0 x 9-0	53.75	110.75	55.25	108	104.75	49.5	107.5	106.25	111.75

Call Out	Wood Door Slab			Wood Door Weight (Pounds)		Optional Full Lite (NVL & HL Available)				Full Lite Door Weight (Pounds)	
	Width (Inches)	Height (Inches)	Thickness (Inches)	SCLC-5	PC-5	Width (Inches)	Height (Inches)	Thickness (Inches)	Standard Bead	SCLC-5 (1/4 Glass)	PC-5 (1/4 Glass)
2-8 x 6-8	39.25	80	1-3/4	131	120	27.25	62	1/4, 3/8	VT1	96	91
3-0 x 6-8	43.25	80	1-3/4	144	132	31.25	62	1/4, 3/8	VT1	104	98
3-0 x 7-0	43.25	84	1-3/4	151	139	31.25	66	1/4, 3/8	VT1	108	103
3-4 x 7-0	47.25	84	1-3/4	165	152	35.25	66	1/4, 3/8	VT1	117	111
4-0 x 7-0	55.25	84	1-3/4	193	177	43.25	66	1/4, 3/8	VT1	134	128
3-0 x 8-0	43.25	96	1-3/4	173	159	31.25	78	1/4, 3/8	VT1	122	116
3-4 x 8-0	47.25	96	1-3/4	189	173	35.25	78	1/4, 3/8	VT1	132	126
4-0 x 8-0	55.25	96	1-3/4	221	203	43.25	78	1/4, 3/8	VT1	151	144
3-0 x 9-0	43.25	108	1-3/4	195	178	31.25	90	1/4, 3/8	VT1	136	130
3-4 x 9-0	47.25	108	1-3/4	213	195	35.25	90	1/4, 3/8	VT1	147	140
4-0 x 9-0	55.25	108	1-3/4	249	228	43.25	90	1/4, 3/8	VT1	168	160


Call Out	Aluminum Door			Stile & Rail			Vision Lite			
	Width (Inches)	Height (Inches)	Thickness (Inches)	Stiles (Inches)	Top Rail (Inches)	Bottom Rail (Inches)	Width (Inches)	Height (Inches)	Thickness (Inches)	Bead (Inches)
2-8 x 6-8	39.25	80	1-3/4	5	5	9.5	29.25	65.5	1/4, 3/8	1/2
3-0 x 6-8	43.25	80	1-3/4	5	5	9.5	33.25	65.5	1/4, 3/8	1/2
3-0 x 7-0	43.25	84	1-3/4	5	5	9.5	33.25	69.5	1/4, 3/8	1/2
3-4 x 7-0	47.25	84	1-3/4	5	5	9.5	37.25	69.5	1/4, 3/8	1/2
4-0 x 7-0	55.25	84	1-3/4	5	5	9.5	45.25	69.5	1/4, 3/8	1/2
3-0 x 8-0	43.25	96	1-3/4	5	5	9.5	33.25	81.5	1/4, 3/8	1/2
3-4 x 8-0	47.25	96	1-3/4	5	5	9.5	37.25	81.5	1/4, 3/8	1/2
4-0 x 8-0	55.25	96	1-3/4	5	5	9.5	45.25	81.5	1/4, 3/8	1/2
3-0 x 9-0	43.25	108	1-3/4	5	5	9.5	33.25	93.5	1/4, 3/8	1/2
3-4 x 9-0	47.25	108	1-3/4	5	5	9.5	37.25	93.5	1/4, 3/8	1/2
4-0 x 9-0	55.25	108	1-3/4	5	5	9.5	45.25	93.5	1/4, 3/8	1/2

** Dimensions listed are for reference only and do not represent the full range of available sizes. Please consult your Serenity Sliding Door Systems sales representative for assistance with specific sizing requirements.


Elevations




Single Sidelite

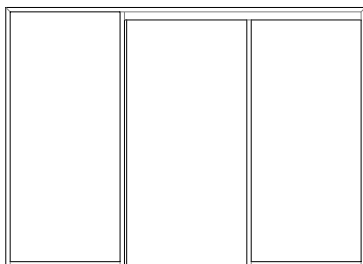


Dual Sidelite

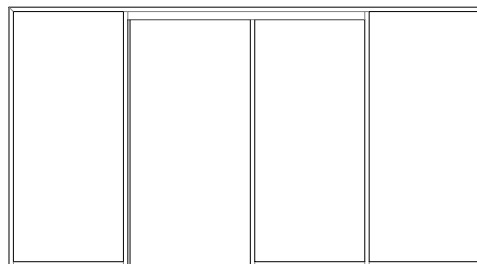


Triple Sidelite

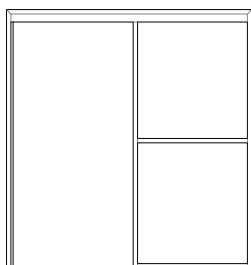


Single Sidelite w/ Mullion

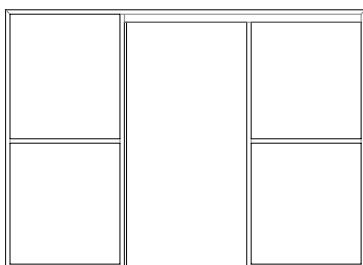


Dual Sidelite w/ Mullion

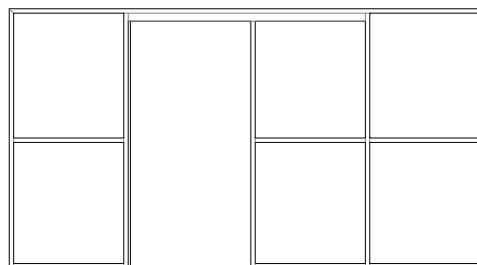


Triple Sidelite w/ Mullion

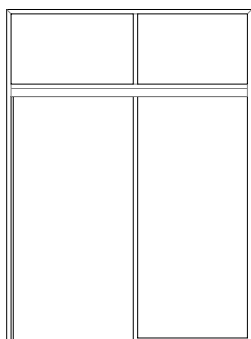


Single Sidelite w/ Transom

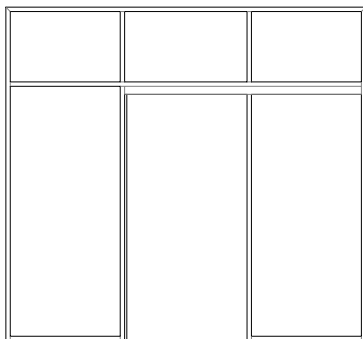


Dual Sidelite w/ Transom

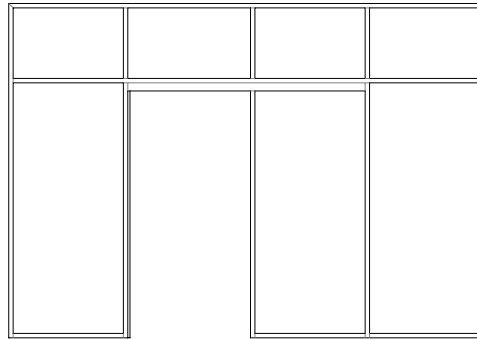


Triple Sidelite w/ Transom

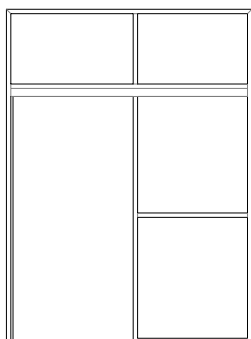

Single Sidelite w/ Mullion & Transom






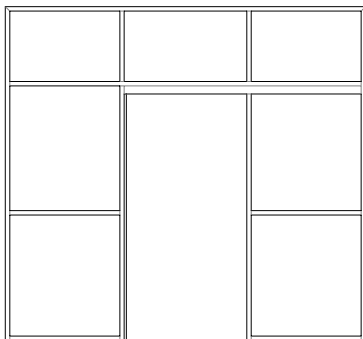


Dual Sidelite w/ Mullion & Transom

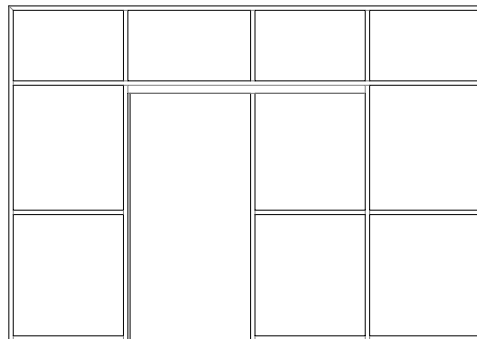

Triple Sidelite w/ Mullion & Transom


Details - Frame & Sidelite Components

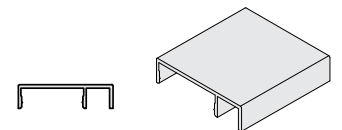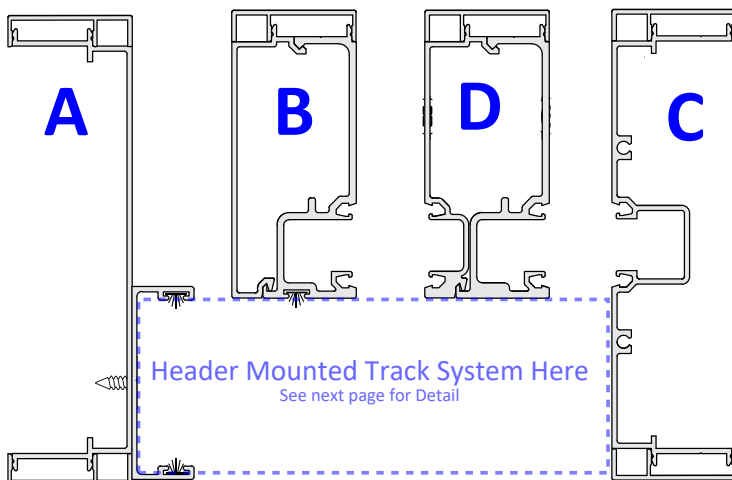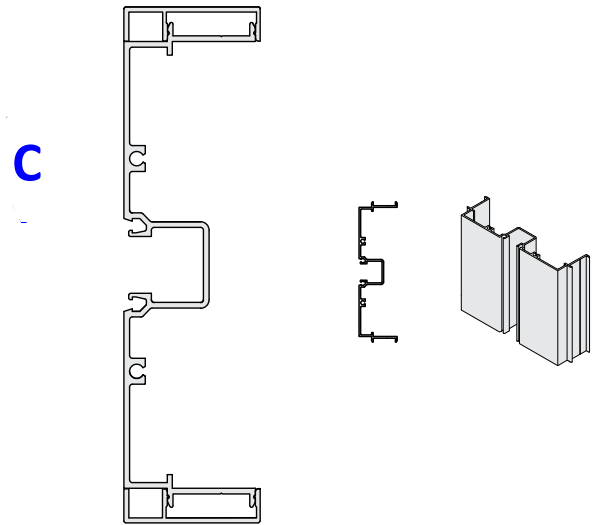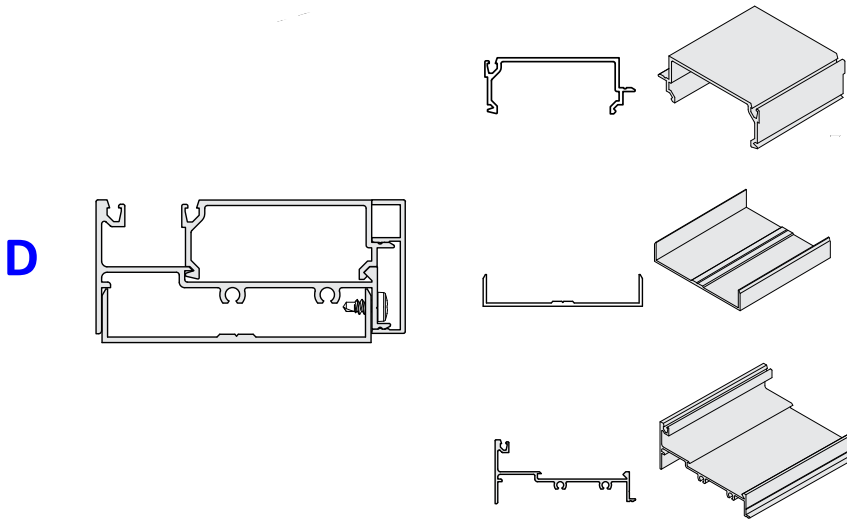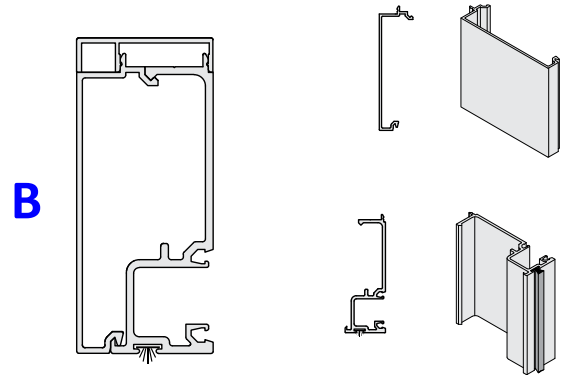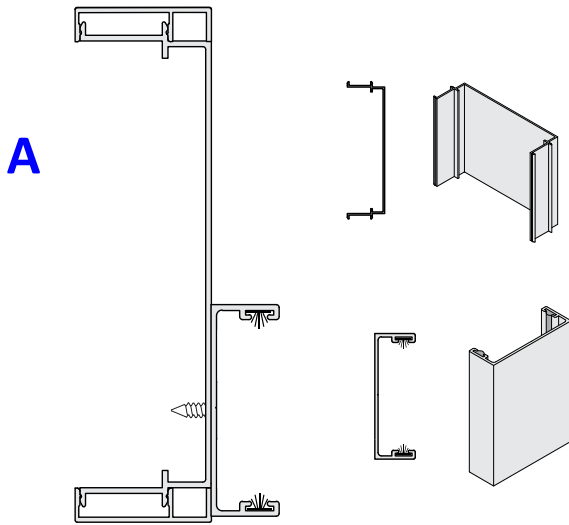

1-1/2" Trim Strip

Details - Track System

EvenView w/ Cased Open Mount

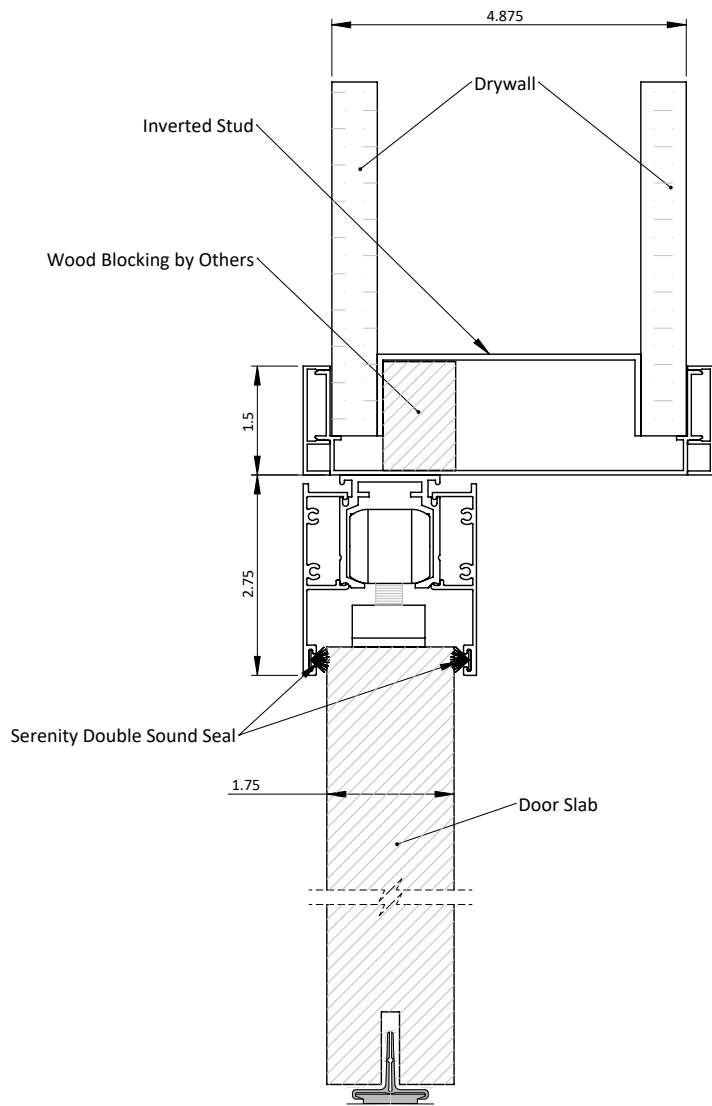

EvenView w/ Pocket Jamb Mount

