



Serenity
Sliding Door Systems

— SECURE YOUR SPACE

SecureSlide

Equipped with a Mechanical Spring Closer and Magnetic lock, this system closes and locks behind the user for ultimate security.

- ✓ Protects Private Spaces
- ✓ Promotes Ease of Use
- ✓ Withstands Heavy Commercial Use



Control Access & Secure Private Spaces

Designed for effortless security, the SecureSlide features a Mechanical Spring Closer that automatically pulls the door closed behind the user. Paired with a Magnetic Lock, the system auto-latches once in a closed position. A Concealed Floor Guide completes the system for smooth, consistent performance.

(Access control accessories by others)

SecureSlide Features



Surface-Mounted Design
Mounts flush to the wall for maximum space savings



Magnetic Lock
Auto-latches once door is in the closed position



Double Sound Seal
Enhances privacy and reduces noise



Mechanical Spring Closer
Offers smooth, assisted door closing



Soft Close
Provides smooth, controlled door movement



Concealed Floor Guide
Guides the door slab for smooth, reliable positioning

OPTIONAL UPGRADES

Electrified Lock

Available with system fail-safe or fail-secure

Acoustic Door Bottom

Drops automatically when the door is closed to create a sound seal



Product Technical Information

	Mounting	Valance	Soft Close & Soft Open	Mechanical Spring Closer	Acoustic Door Bottom	Locking	Aluminum Door	Automatic Operator	Sidelite (Glass by Others)	Transom	STC	Smoke Rating
MedSlide	Surface	Squared or Sloped	Standard	--	Optional	Optional	Optional	--	--	--	--	--
MedSlide Plus	Surface	Squared or Sloped	Standard	--	Standard	Optional	--	Optional	--	--	STC26 ₁	--
MedSlide Pro	Surface	Squared or Sloped	Standard	--	Standard	Optional	--	Optional	--	--	STC35 ₂	--
PowerSlide	Surface	Standard Valance	Standard	--	Optional	Access Control by Others	Optional	Standard ₃	Optional	--	Optional	--
SurfaceView Slide	Surface	Squared or Sloped	Standard	Optional	Optional	Optional	Optional	Optional	Standard	Optional	--	--
EvenView Slide	Flush	Fascia Only	Standard	--	Optional	Optional	Optional	--	Standard	Optional	--	--
SmokeSlide	Surface	Squared or Sloped	Soft Close Only	Standard	Standard	Optional	Optional	Optional	--	--	--	UL1784 ₄
SecureSlide	Surface	Squared or Sloped	Soft Close Only	Standard	Optional	Auto Latch Standard	Optional	Optional	Optional	Optional	--	--
SyncSlide	Surface	Squared or Sloped	Standard	--	Optional	Optional	Optional	Optional	Optional	--	--	--

-- = Not Available

1 = Tested per ASTM E90 on a 48" x 84.5" operable door with an STC rating of 26. Performance may vary with other sizes; no guarantee is made without testing the specific configuration. Test results available [here](#).

2 = Tested per ASTM E90 on a 44" x 83.75" operable door with an STC rating of 35. Performance may vary with other sizes; no guarantee is made without testing the specific configuration. Test results available [here](#).

3 = Includes Record 7000 Series Automatic Opener

4 = Approved for door leaf sizes from 44" x 84" up to a maximum of 56" x 96" per the current UL 1784 listing. Performance applies only to doors built to the same configuration; changes to size, materials, or sealing details may affect results. Wood test results are available [here](#), and Aluminum test results are available [here](#).

Surface Mount Formulas (Excluding SurfaceView & SyncSlide)

Finished Frame (Inches)	Frame Width = Clear Open Width + 5 Frame Height = Clear Open Height
Rough Opening (Inches)	Rough Open Width = Frame Width + 1.5 Rough Open Height = Frame Height + 1
Door Slab (Inches)	Slab Width = Clear Open Width + 8 Slab Height = Clear Open Height

EvenView Formulas

Finished Frame (Inches)	Frame Width = Clear Open Width + 5.75 Frame Height = Clear Open Height + 2.75
Sidelite (Inches)	Minimum Sidelite Width = Clear Open Width + 1.5 Sidelite Height = Clear Open Height - 1.5
Rough Opening (Inches)	Rough Open Width = Finished Frame + Sidelite + 3 Rough Open Height = Finished Frame + 1
Door Slab (Inches)	Slab Width = Clear Open Width + 7.25 Slab Height = Clear Open Height

Frame

- Standard frame depths are 5", 5-1/4", 5-1/2", 6-1/8" and 7-1/4". Please contact your local sales rep for questions regarding other frame sizes.
- The EvenView Slide frame is available only in a 4-7/8" depth; greater depths require a wall starter.
- Standard frame finishes are Clear and Black Anodized. All Powder Coat finishes are considered custom and subject to additional fees.

Hardware

- Standard hardware package includes 12" back-to-back ladder pulls, dual soft-close mechanisms, and floor guide, unless otherwise specified in the table above; upgraded packages available at additional cost.
- Standard hardware finishes are 630/32D and 622/19. All other finishes are considered custom and subject to additional fees.
- Standard Schlage C cylinder in 26D finish included with keyed locksets; SFIC and LFIC housings available upon request (cores by others).
- Kenwa PS-12 Mechanical Spring Closer included with SmokeSlide and SecureSlide; optional on other systems at additional cost.

Seals

- Triple fin trailing-edge seal included with all systems.
- Felt sound seals installed in receiving channel and track valance for added sound attenuation.
- Pemko Planet SN-RD series acoustic door bottom included on all STC & Smoke-rated openings; optional on other systems at additional cost.

Supporting Documents

Test Reports

[Link](#)

Installation Manuals

[Link](#)

Architectural Specifications

[Link](#)

Product Technical Information

Call Out	Frame		Rough Opening		Door Slab		Track
	Width (Inches)	Height (Inches)	Width (Inches)	Height (Inches)	Width (Inches)	Height (Inches)	Length (Inches)
2-8 x 6-8	37	80	38.5	81	40	80	75
3-0 x 6-8	41	80	42.5	81	44	80	83
3-0 x 7-0	41	84	42.5	85	44	84	83
3-4 x 7-0	45	84	46.5	85	48	84	91
3-6 x 7-0 TrimFit	46.5	84	48	85	48	84	93
4-0 x 7-0	53	84	54.5	85	56	84	107
3-0 x 8-0	41	96	42.5	97	44	96	83
3-4 x 8-0	45	96	46.5	97	48	96	91
3-6 x 8-0 TrimFit	46.5	96	48	97	48	96	93
4-0 x 8-0	53	96	54.5	97	56	96	107
3-0 x 9-0	41	108	42.5	109	44	108	83
3-4 x 9-0	45	108	46.5	109	48	108	91
3-6 x 9-0 TrimFit	46.5	108	48	109	48	108	93
4-0 x 9-0	53	108	54.5	109	56	108	107


Call Out	Wood Door Slab			Wood Door Weight (Pounds)		Optional Full Lite (NVL & HL Available)				Full Lite Door Weight (Pounds)	
	Width (Inches)	Height (Inches)	Thickness (Inches)	SCLC-5	PC-5	Width (Inches)	Height (Inches)	Thickness (Inches)	Standard Bead	SCLC-5 (1/4 Glass)	PC-5 (1/4 Glass)
2-8 x 6-8	40	80	1-3/4	133	122	28	62	1/4, 3/8	VT1	97	92
3-0 x 6-8	44	80	1-3/4	146	134	32	62	1/4, 3/8	VT1	105	100
3-0 x 7-0	44	84	1-3/4	154	141	32	66	1/4, 3/8	VT1	110	104
3-4 x 7-0	48	84	1-3/4	168	154	36	66	1/4, 3/8	VT1	118	113
3-6 x 7-0 TrimFit	48	84	1-3/4	168	154	36	66	1/4, 3/8	VT1	118	113
4-0 x 7-0	56	84	1-3/4	196	180	44	66	1/4, 3/8	VT1	135	129
3-0 x 8-0	44	96	1-3/4	176	161	32	78	1/4, 3/8	VT1	124	118
3-4 x 8-0	48	96	1-3/4	192	176	36	78	1/4, 3/8	VT1	133	127
3-6 x 8-0 TrimFit	48	96	1-3/4	192	176	36	78	1/4, 3/8	VT1	133	127
4-0 x 8-0	56	96	1-3/4	224	205	44	78	1/4, 3/8	VT1	152	145
3-0 x 9-0	44	108	1-3/4	198	181	32	90	1/4, 3/8	VT1	138	131
3-4 x 9-0	48	108	1-3/4	216	198	36	90	1/4, 3/8	VT1	148	142
3-6 x 9-0 TrimFit	48	108	1-3/4	216	198	36	90	1/4, 3/8	VT1	148	142
4-0 x 9-0	56	108	1-3/4	252	231	44	90	1/4, 3/8	VT1	169	162

Call Out	Aluminum Door			Stile & Rail			Vision Lite			
	Width (Inches)	Height (Inches)	Thickness (Inches)	Stiles (Inches)	Top Rail (Inches)	Bottom Rail (Inches)	Width (Inches)	Height (Inches)	Thickness (Inches)	Bead (Inches)
2-8 x 6-8	40	80	1-3/4	5	5	9.5	30	65.5	1/4, 3/8	1/2
3-0 x 6-8	44	80	1-3/4	5	5	9.5	34	65.5	1/4, 3/8	1/2
3-0 x 7-0	44	84	1-3/4	5	5	9.5	34	69.5	1/4, 3/8	1/2
3-4 x 7-0	48	84	1-3/4	5	5	9.5	38	69.5	1/4, 3/8	1/2
3-6 x 7-0 TrimFit	48	84	1-3/4	5	5	9.5	38	69.5	1/4, 3/8	1/2
4-0 x 7-0	56	84	1-3/4	5	5	9.5	46	69.5	1/4, 3/8	1/2
3-0 x 8-0	44	96	1-3/4	5	5	9.5	34	81.5	1/4, 3/8	1/2
3-4 x 8-0	48	96	1-3/4	5	5	9.5	38	81.5	1/4, 3/8	1/2
3-6 x 8-0 TrimFit	48	96	1-3/4	5	5	9.5	38	81.5	1/4, 3/8	1/2
4-0 x 8-0	56	96	1-3/4	5	5	9.5	46	81.5	1/4, 3/8	1/2
3-0 x 9-0	44	108	1-3/4	5	5	9.5	34	93.5	1/4, 3/8	1/2
3-4 x 9-0	48	108	1-3/4	5	5	9.5	38	93.5	1/4, 3/8	1/2
3-6 x 9-0 TrimFit	48	108	1-3/4	5	5	9.5	38	93.5	1/4, 3/8	1/2
4-0 x 9-0	56	108	1-3/4	5	5	9.5	46	93.5	1/4, 3/8	1/2


** Dimensions listed are for reference only and do not represent the full range of available sizes. Please consult your Serenity Sliding Door Systems sales representative for assistance with specific sizing requirements.

Elevations





SecureSlide with Squared Valance

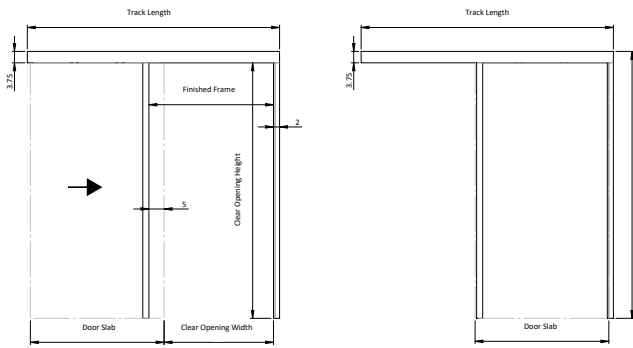






SecureSlide with Sloped Valance

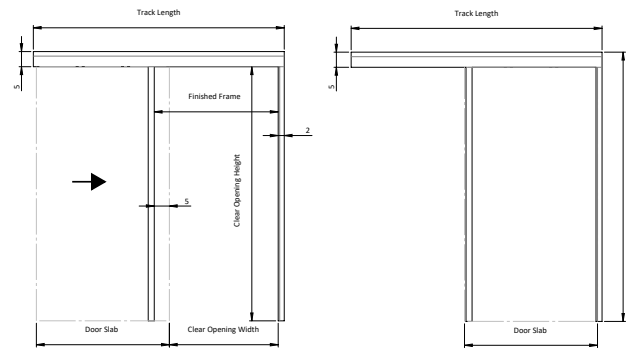


Details

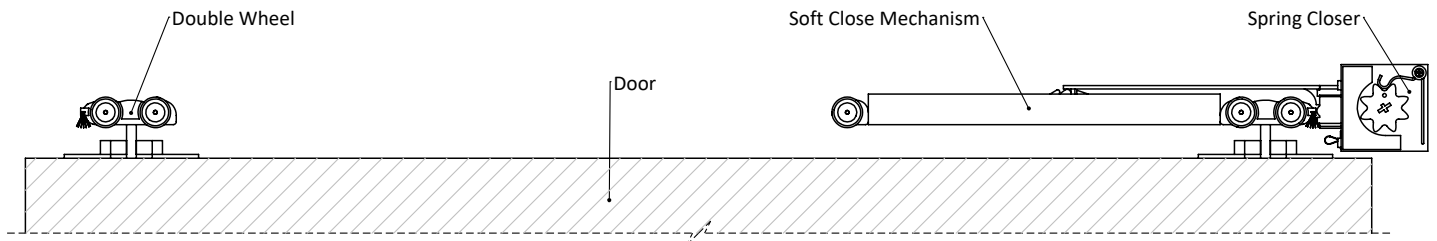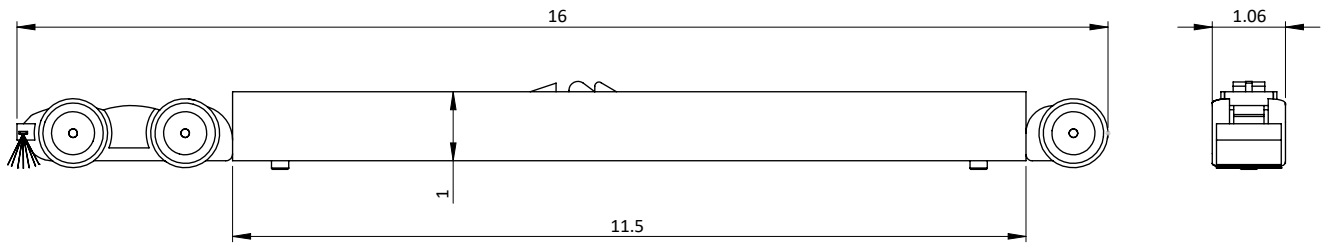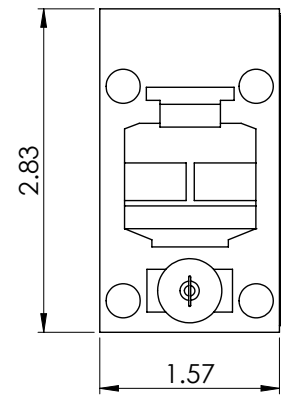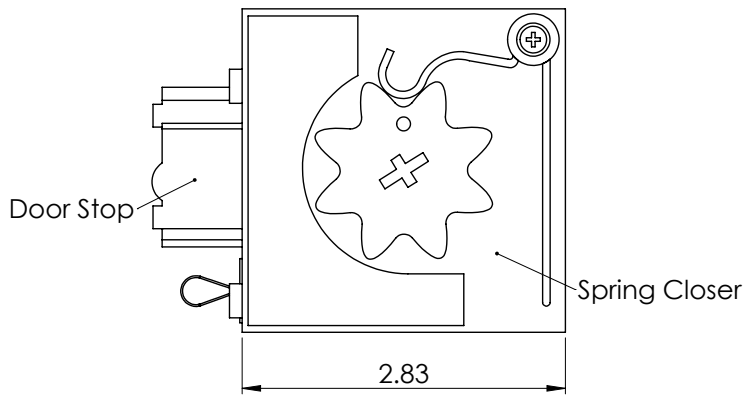

Details - Squared Valance

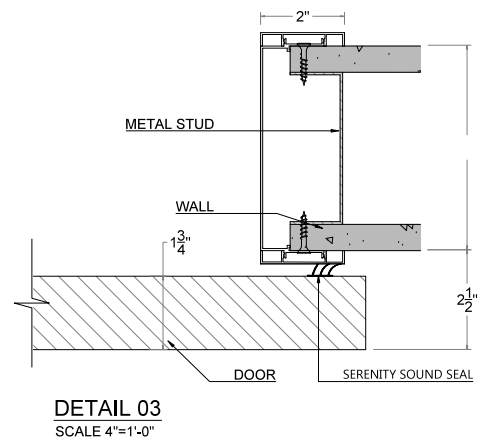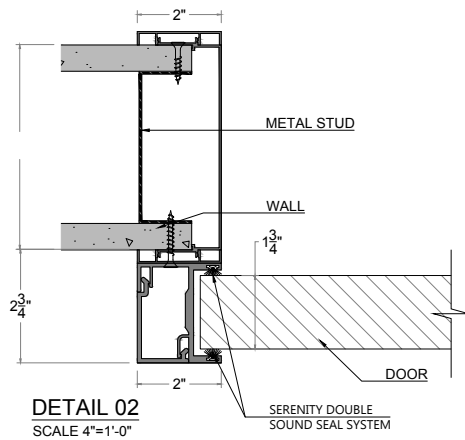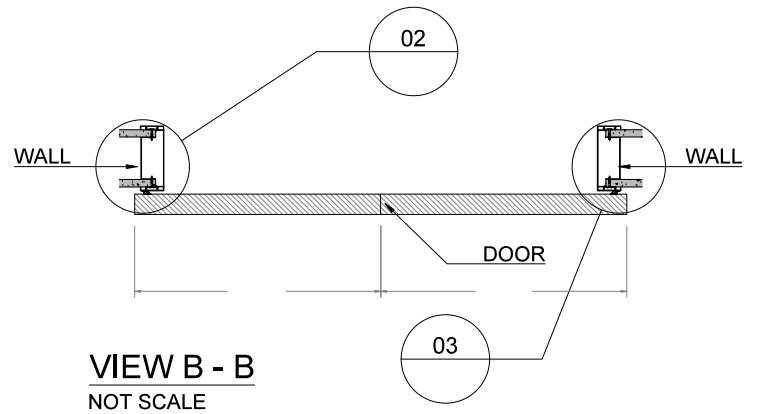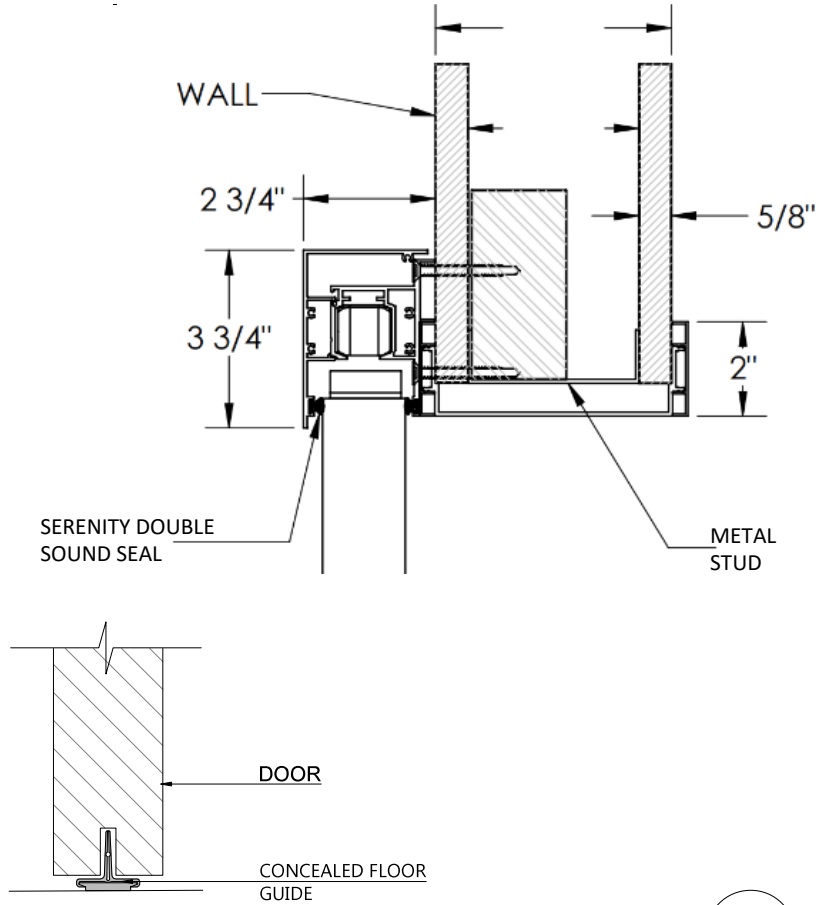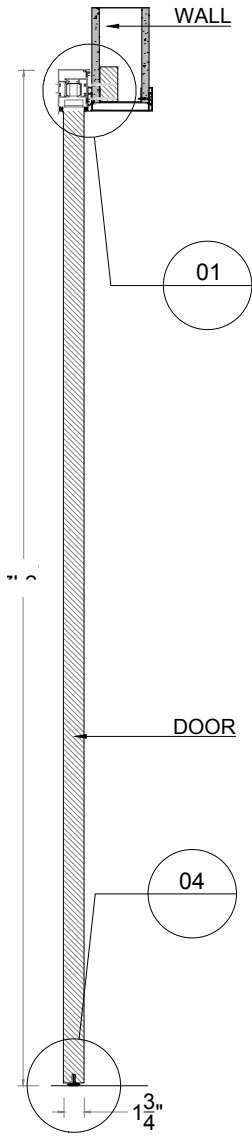

Details - Sloped Valance

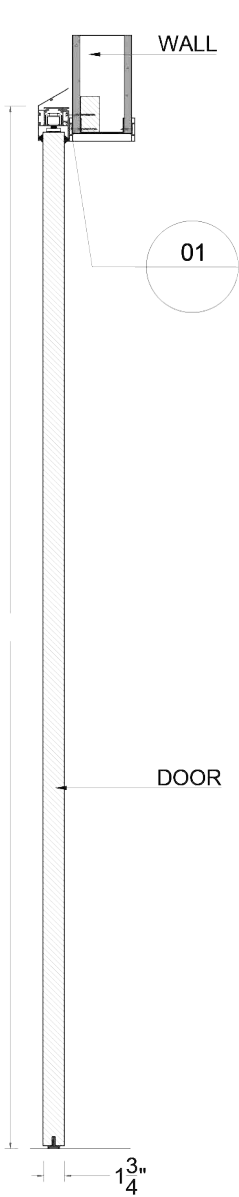

VIEW A - A

